


PRODUCT DATA SHEET

CRI Available
80/90

High
Efficiency

150
lm/W

High Efficiency 150lm/W
2835 128 LEDs/m 9.6W/m

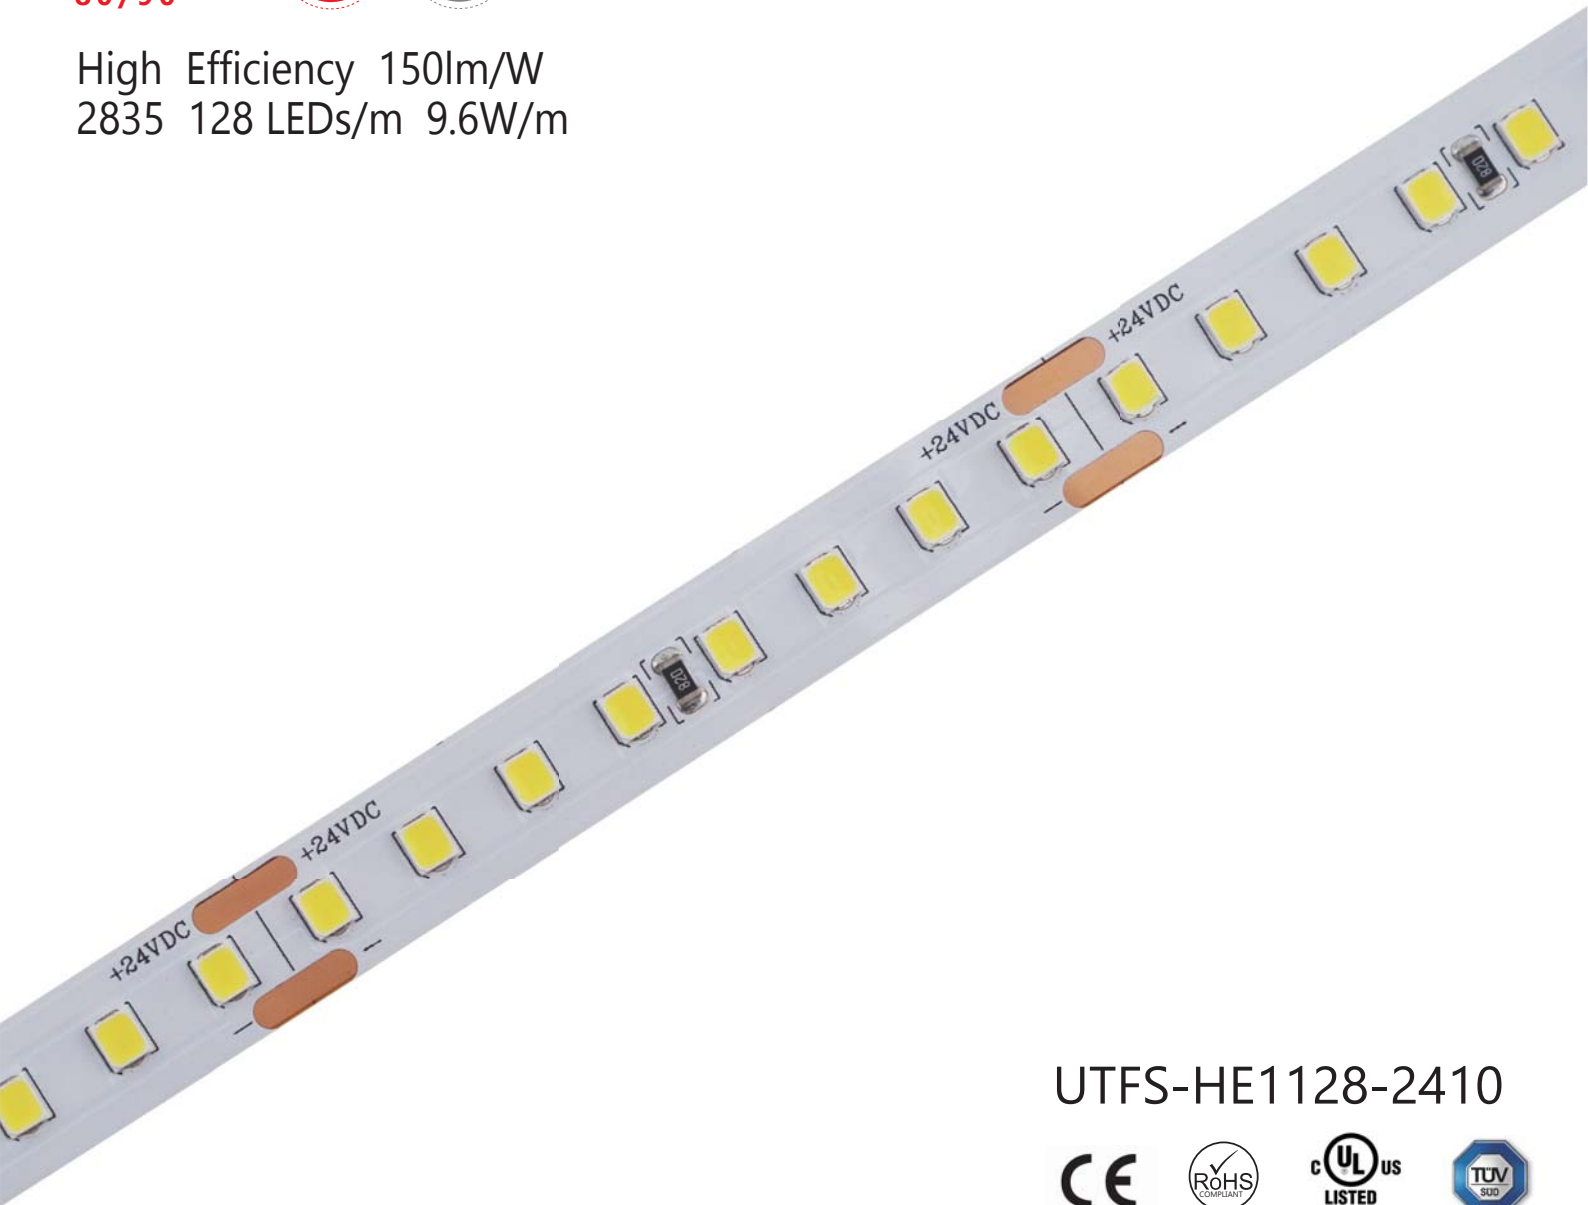

UTFS-HE1128-2410




Product Features

1. 8 LEDs in series per circuit section, available to achieve high light , efficacy output up to 150lm/W
2. Operate longer life and better for energy saving
3. Standard strip is CRI>80 and provide High CRI>90 option


CCT Option



IP Rating Option

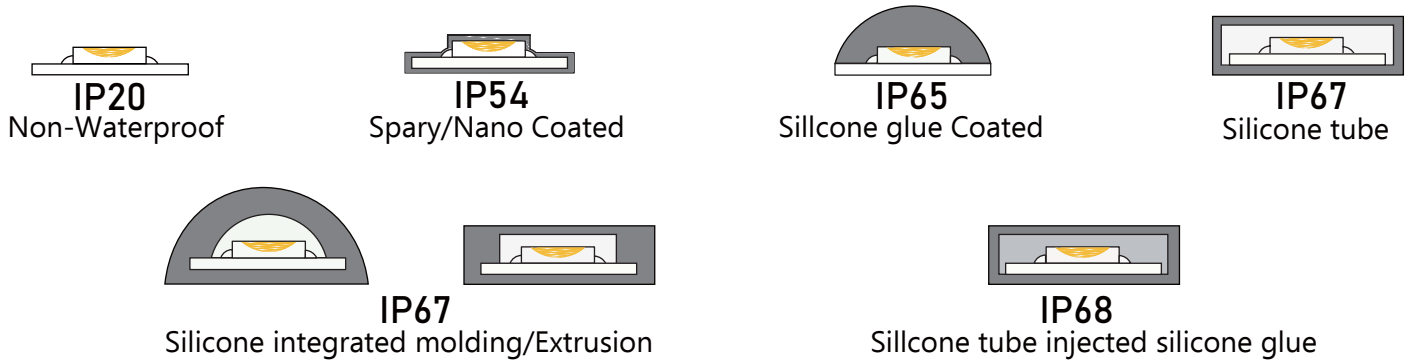

Dimensions

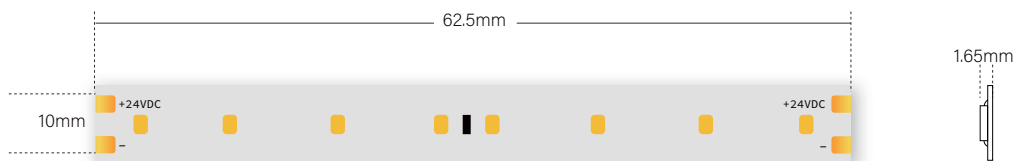


Note:

LED strip length tolerance is + -0.2%mm.
 Width tolerance is + -0.2%mm.
 Size of each section is 62.5mm.
 DC 24V



Diagram

Dimensions (mm)

Length/Reel	Width	Height	Min. Cutting 
5000	10	1.65	Every 62.5 mm (8 LEDs)



Data

Part Number	Working Voltage	Power (W/m)	Current (A/m)	LED Qty/m	CRI
UTFS-HE1128-2410	24V	9.6W/m	0.39A/m	128	80+

CCT (°K)	Luminous Efficiency	lumen/m
2700K	153lm/W	1468lm/m
3000K	153lm/W	1468lm/m
4000K	159lm/W	1526lm/m
6000K	159lm/W	1526lm/m


Note:

The data base on IP20 non-waterproof.
 The Lumen output value tolerance + -5% due to testing way.
 The CCT will be + -100k tolerance.


Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Thermal Measurement Point	Tc	80	
Operating Temperature	Topr	-20~+40	°C
Storage Temperature	Ts	-20~+80	
Number of FPC Connection			


Wiring Diagram Application

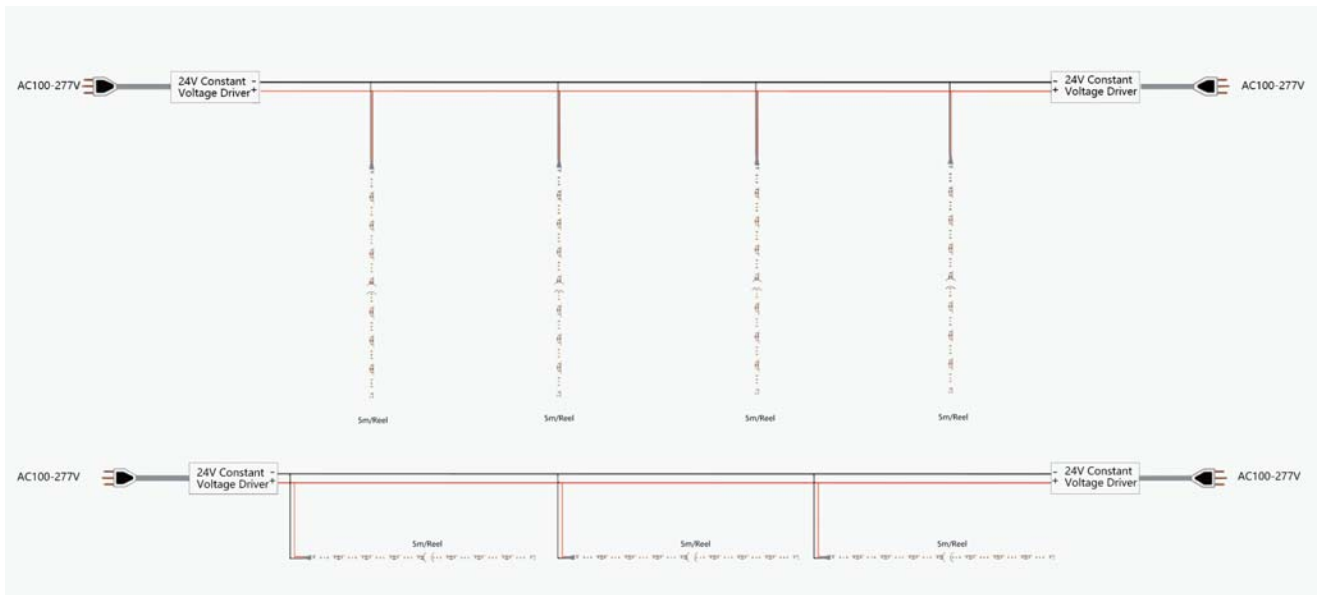


Packaging

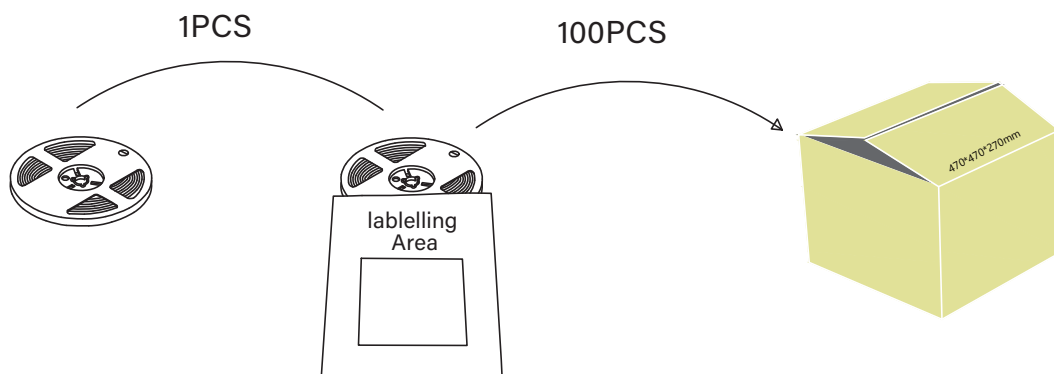

Cautions

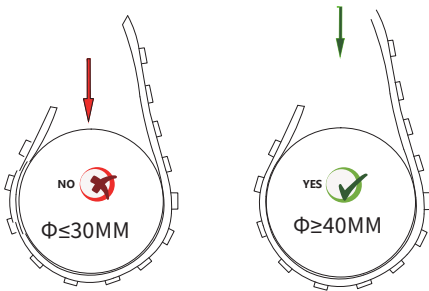

<50mm diameter of wrapped object prohibited

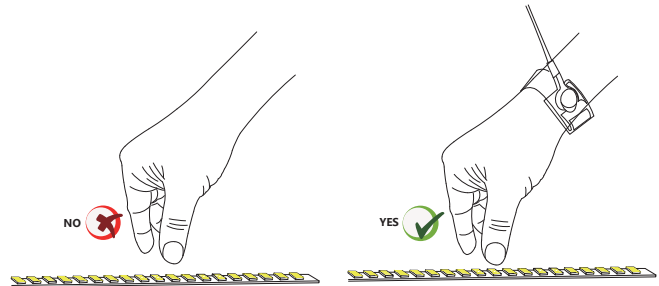

Pls wear the electrostatics ring for avoid ESD

Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Do not extend beyond the recommended maximum run length.
3. Only use copper wiring. Use wires rated for at least 176°F(80°C) and certified for use with external connection of electrical equipment.
4. Do not install IP20 LED strip products in outdoor / wet location environments.
5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Improper wire selection and installation could overheat wires, and cause fire.
7. Do not connect directly to high voltage or AC power.
8. Installation must be in accordance with local and national electrical code regulations.
9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.