


PRODUCT DATA SHEET

CRI Available
80/90/98

High
Efficiency

150
lm/W

High Efficiency 150lm/W
2835 160 LEDs/m 14.4W/m

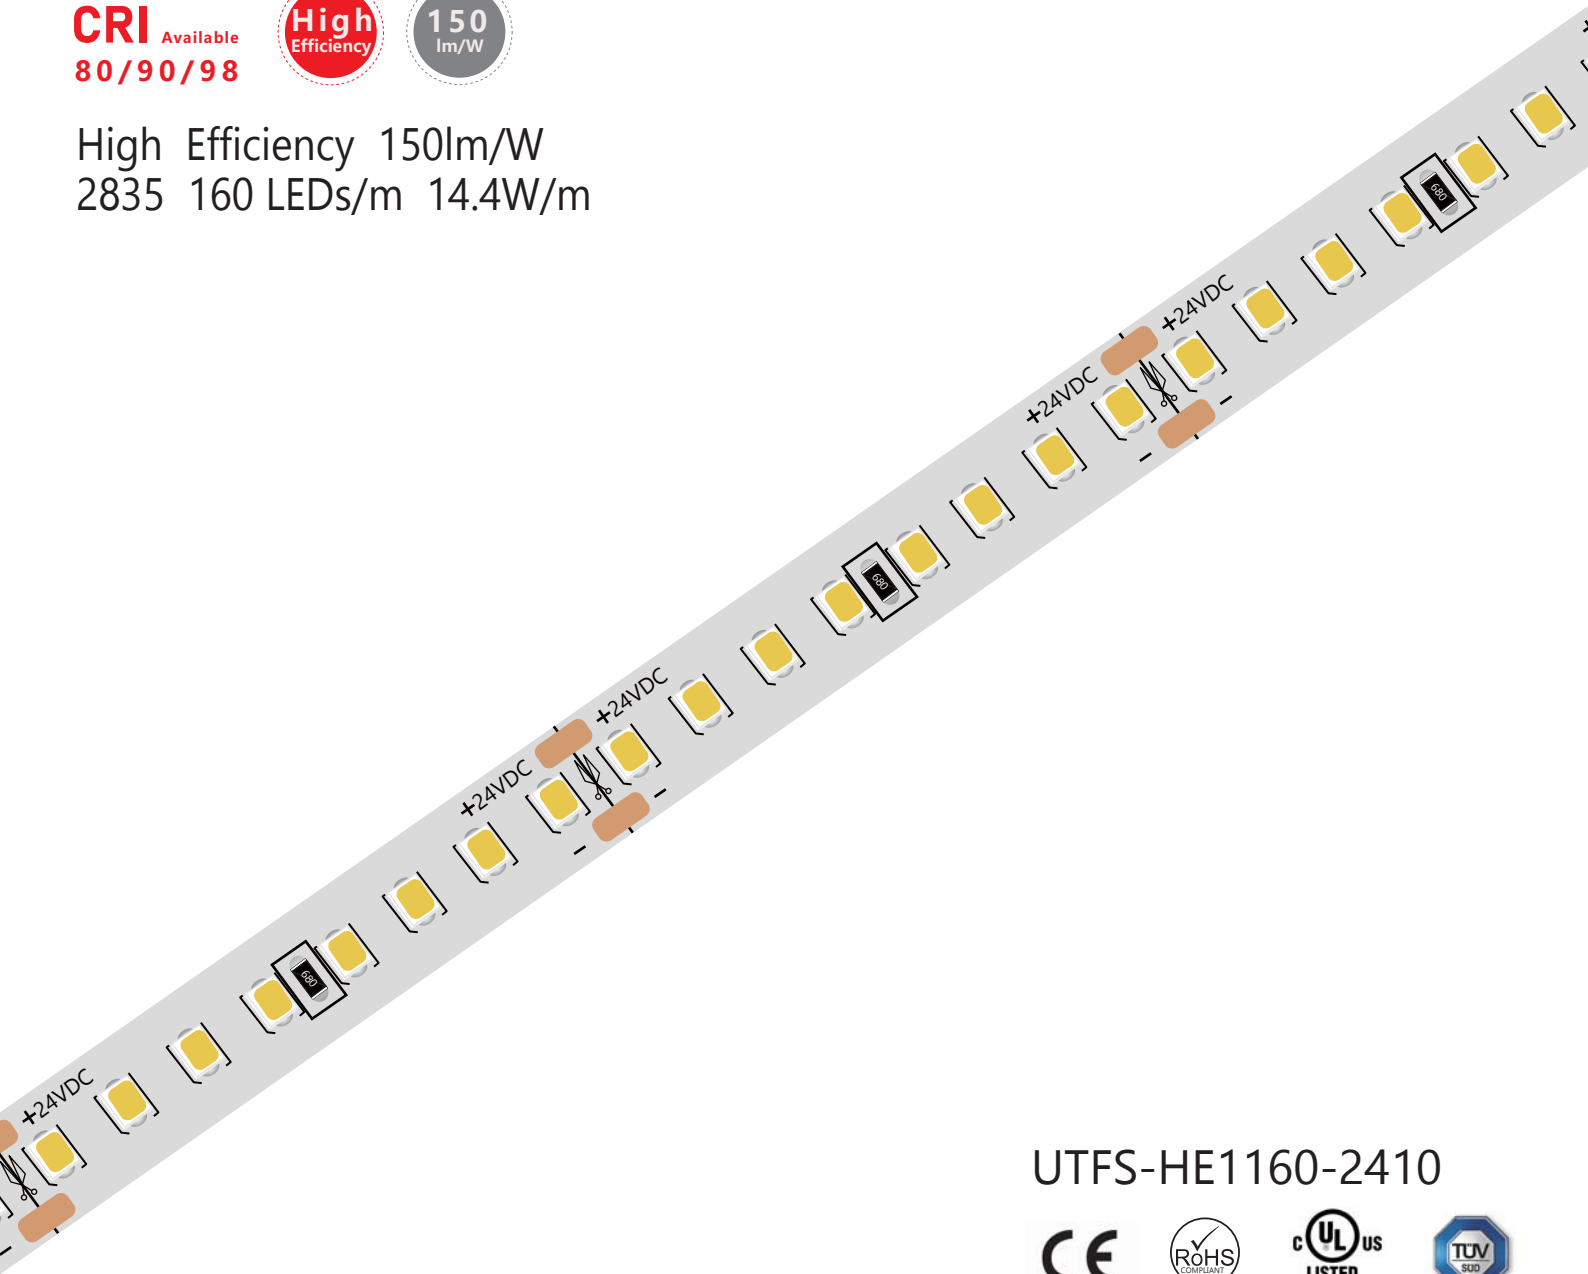

UTFS-HE1160-2410





Product Features


1. 8 LEDs in series per circuit section, available to achieve high light , efficacy output up to 150lm/W
2. Operate longer life and better for energy saving
3. Standard strip is CRI>80 and provide High CRI>90/98 option




CCT Option



IP Rating Option

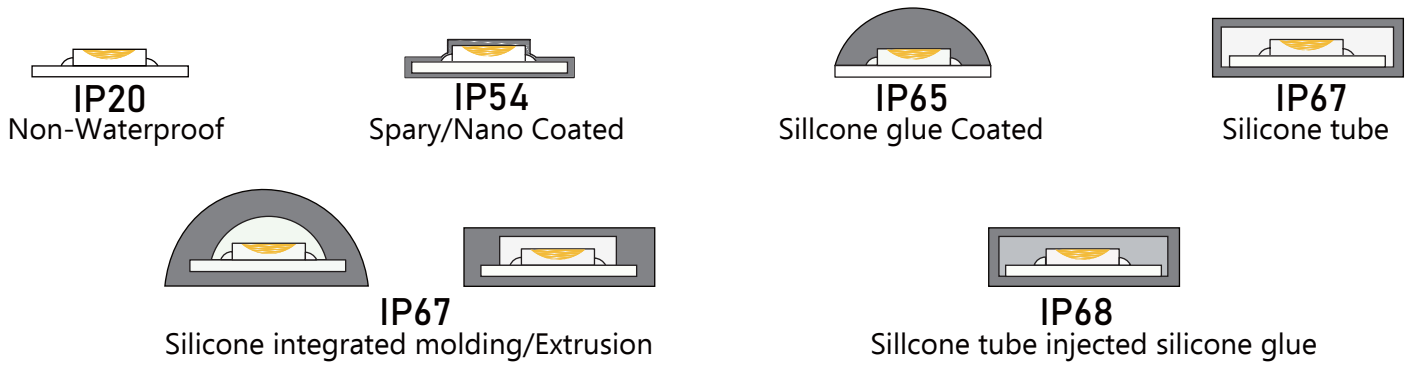

Dimensions

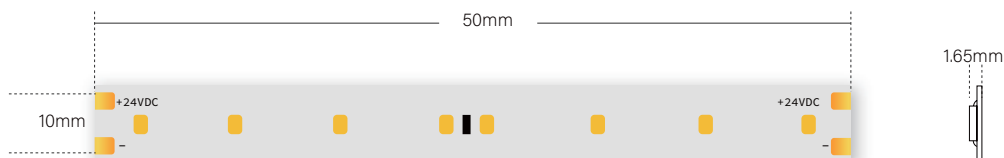

Note:

LED strip length tolerance is + -0.2%mm.
Width tolerance is + -0.2%mm.
Size of each section is 50mm.
DC 24V

Diagram

Dimension (mm)

Length/Reel	Width	Height	Min. Cutting ✂
5000	10	1.65	Every 50 mm (8 LEDs)

Data

Part Number	Working Voltage	Power (W/m)	Current (A/m)	LED Qty/m	CRI
UTFS-HE1160-2410	24V	14.4W/m	0.56A/m	160	80+

CCT (°K)	Luminous Efficiency	lumen/m
2700K	146lm/W	2103lm/m
3000K	146lm/W	2103lm/m
4000K	157lm/W	2260lm/m
6000K	157lm/W	2260lm/m

Note:

The data base on IP20 non-waterproof.
The Lumen output value tolerance + -5% due to testing way.
The CCT will be + -100k tolerance.




Absolute Maximum Ratings


Parameter	Symbol	Value	Units
Thermal Measurement Point	T _c	80	
Operating Temperature	T _{opr}	-20~+40	°C
Storage Temperature	T _s	-20~+80	
Number of FPC Connection			




Wiring Diagram Application

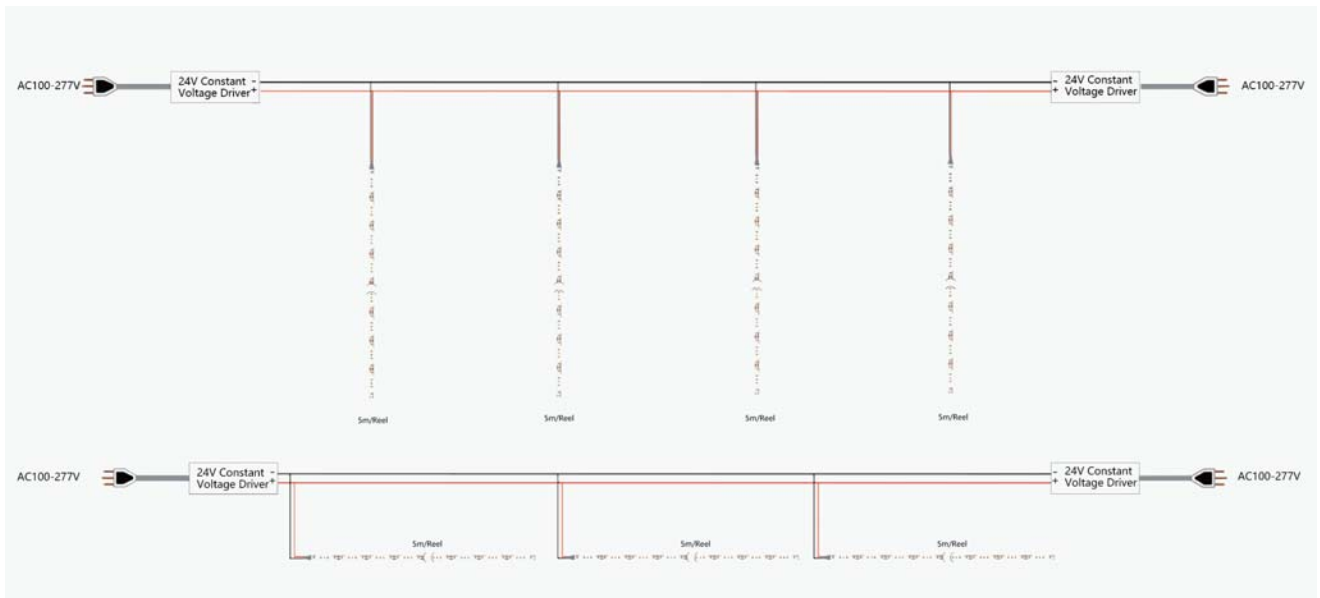


Packaging

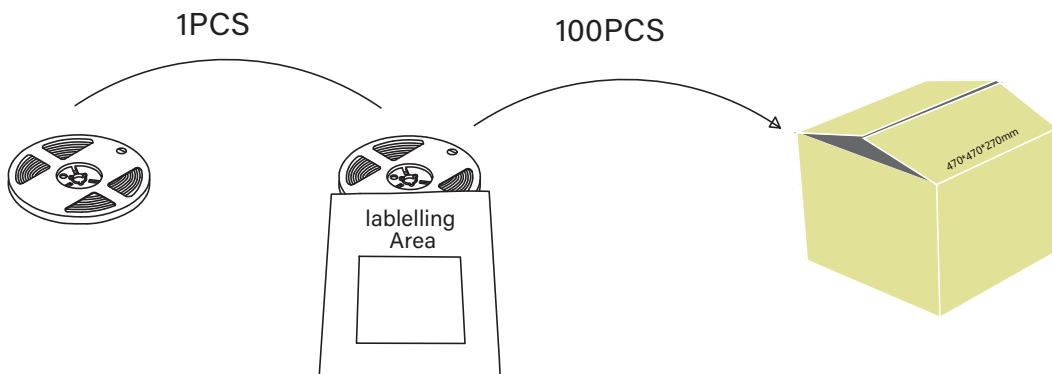

! Cautions

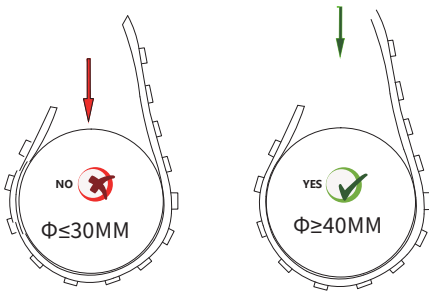

<50mm diameter of wrapped object prohibited

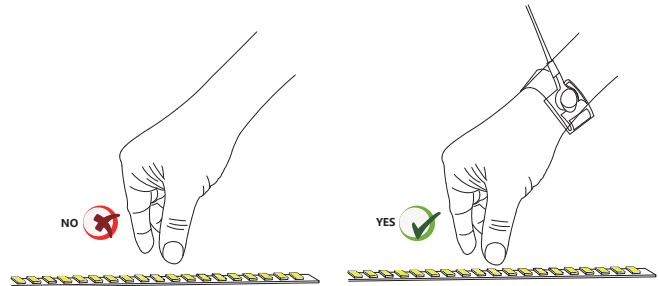

Pls wear the electrostatics ring for avoid ESD

✓ Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Do not extend beyond the recommended maximum run length.
3. Only use copper wiring. Use wires rated for at least 176°F(80°C) and certified for use with external connection of electrical equipment.
4. Do not install IP20 LED strip products in outdoor / wet location environments.
5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Improper wire selection and installation could overheat wires, and cause fire.
7. Do not connect directly to high voltage or AC power.
8. Installation must be in accordance with local and national electrical code regulations.
9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.