


PRODUCT DATA SHEET



S-Shape Bendable

2835 60LEDs/m 4.8W/m

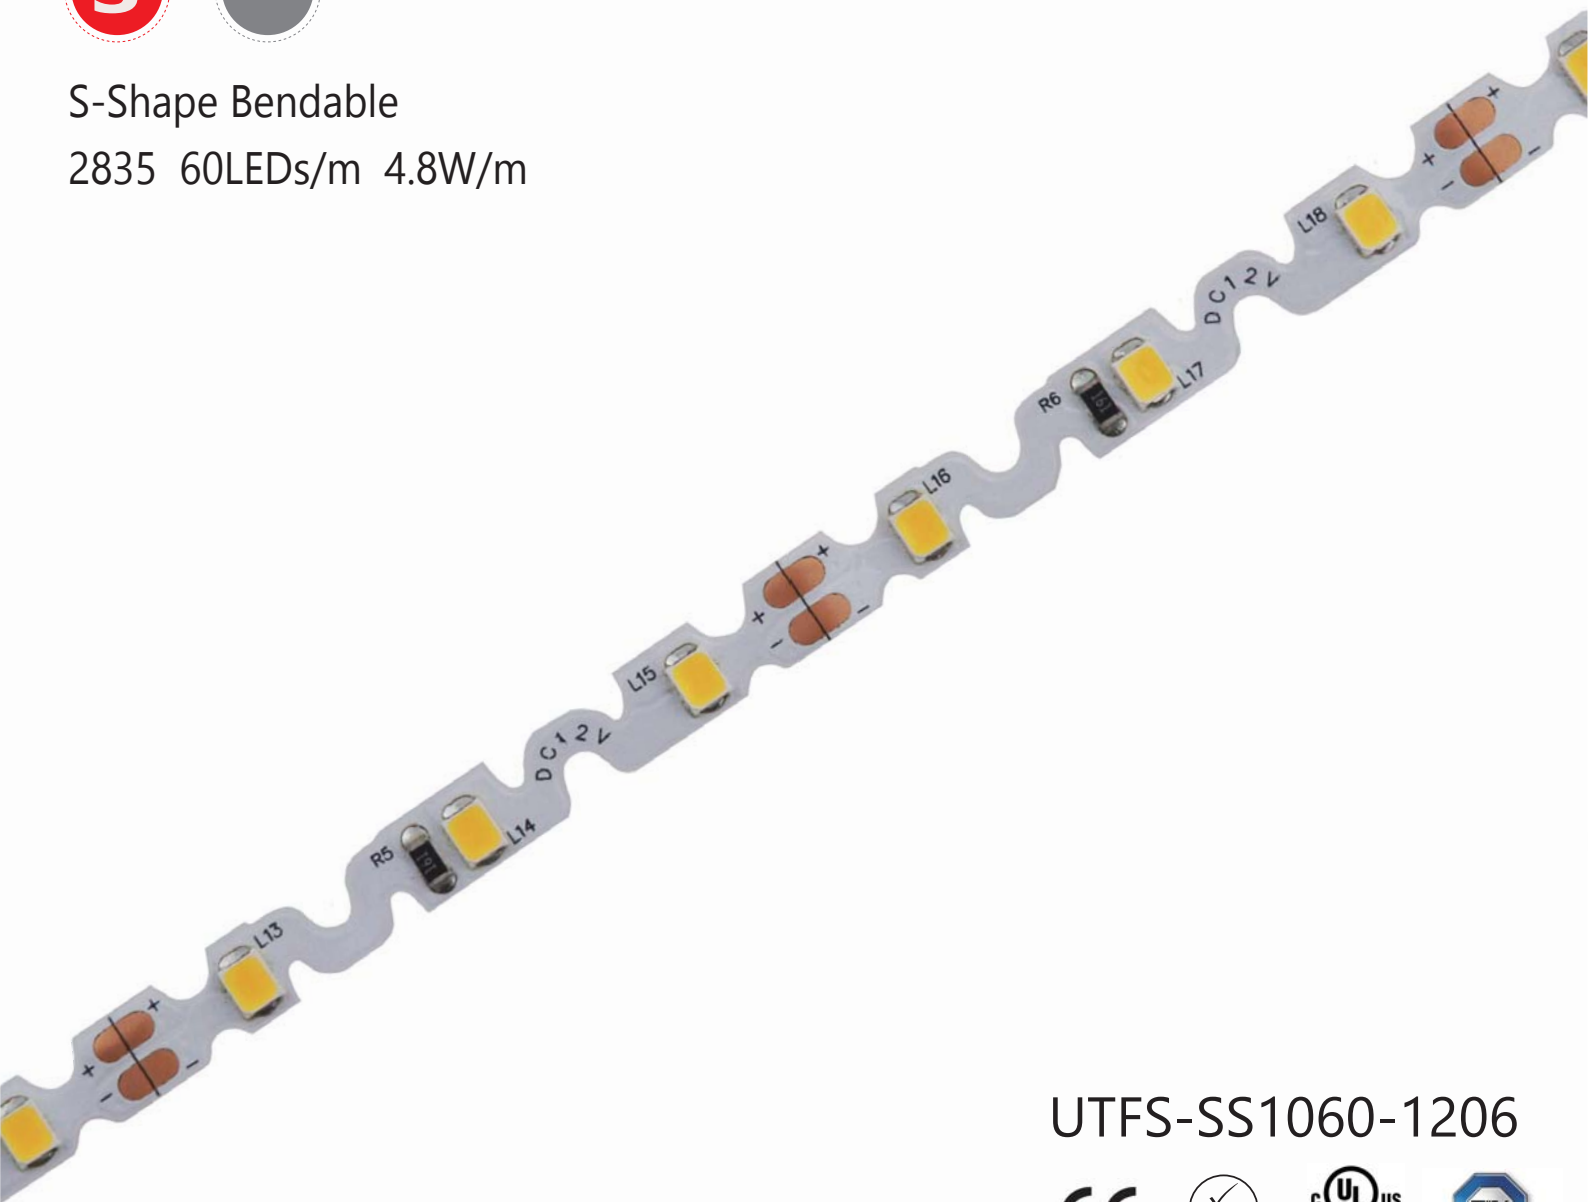

UTFS-SS1060-1206



Product Features

1. ➤ Special S type PCB design, bendable in every way
2. ➤ Lm80 2835 SMD with Epistar chip inside
3. ➤ Three or six leds per unit can be cut according to printing mark
4. ➤ Ideal for office, residential, retail and industry lighting


CCT Option



IP Rating Option



Dimensions

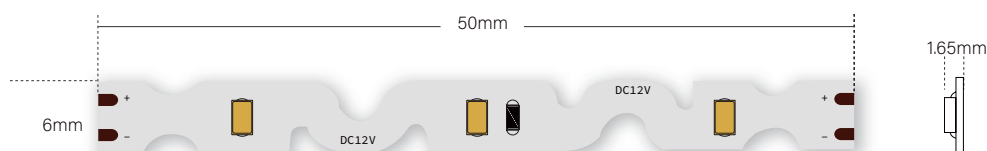

Note:

LED strip length tolerance is + -0.2%mm.
Width tolerance is + -0.2%mm.
Size of each section is 50mm.
DC 12V

Diagram

Dimenions mm/inch

Length/Reel	Width	Height	Min. Cutting ✂
5000/196.85	6/0.2362	1.65/0.0649	Every 50mm/1.9685inch (3 LEDs)

Data


Part Number	Working Voltage	Power (W/m)	Current (A/m)	LED Qty/m	CRI
UTFS-SS1060-1206	12V/24V	4.8W/m	0.4132A/m	60	80+

CCT (°K)	Luminous Efficiency	lumen/m
2700K	109.11lm/W	540.9lm/m
3000K	109.11lm/W	540.9lm/m
4000K	117.8lm/W	565.4lm/m
6000K	117.8lm/W	565.4lm/m


Note:

The data base on IP20 non-waterproof.
The Lumen output value tolerance + -5% due to testing way.
The CCT will be + -100k tolerance.

! Cautions

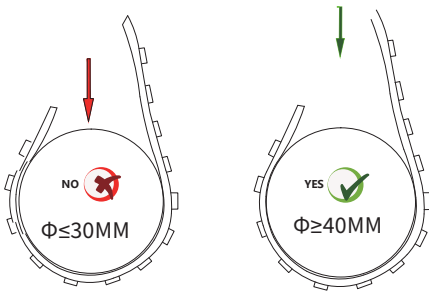

<50mm diameter of wrapped object prohibited

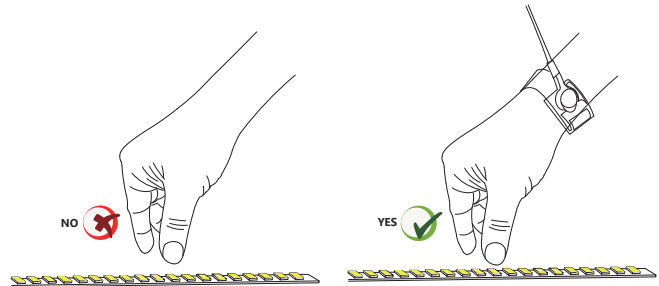

Pls wear the electrostatics ring for avoid ESD

✓ Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Do not extend beyond the recommended maximum run length.
3. Only use copper wiring. Use wires rated for at least 176°F(80°C) and certified for use with external connection of electrical equipment.
4. Do not install IP20 LED strip products in outdoor / wet location environments.
5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Improper wire selection and installation could overheat wires, and cause fire.
7. Do not connect directly to high voltage or AC power.
8. Installation must be in accordance with local and national electrical code regulations.
9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.