

# SPECIFICATION



### **Basic Series COB LED Strip**

Model No.: UTFS-BSCOB320-2410

UT FS BS COB 320 24 10

Unitop	Flexible Strips	Product Series	LED Type	LED Qty/M	Voltage	PCB Width
		Basic Series	COB LEDs	320 LEDs	DC24V	10mm PCB

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.

## Product Features:

- Big beam angle, no dark area, flexible line source with good heat dissipation.
- Cost-effective.
- Cutting length: 50mm.
- Inverted COB gold-free technology
- Ra>90, cuttable and re-connectable.
- IP Rate: IP20, IP65, IP66
- CE/ROHS certification.
- Warranty: 3 Years

### Applications:

Widely used in hotels, shopping malls, furniture, cabinets, and shelves as decoration and direct or indirect lighting.



3M Adhesive tape, mounting clips, aluminum profiles.



Unitop (China) Co., Limited Website: <a href="https://www.unitopledstrip.com">https://www.unitopledstrip.com</a>

E-mail: tom@unitopledstrip.com Mobile: +86-19896260511

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.



### - Optical & Electrical:

Unitop Model No.	Color	сст	CRI	View Angle	Lumen	Efficacy	Working Voltage	Current (mA/M)	Power
UTFS- BSCOB320- 2410WW	Warm White	2700K	≥90Ra	180°	699.2	87.4	24VDC	333.3	8W/M
UTFS- BSCOB320- 2410WW	Warm White	3000K	≥90Ra	180°	742.4	92.8	24VDC	333.3	8W/M
UTFS- BSCOB320- 2410NW	Natural White	4000K	≥90Ra	180°	821.6	102.7	24VDC	333.3	8W/M
UTFS- BSCOB320- 2410CW	Cool White	6500K	≥90Ra	180°	856.8	107.1	24VDC	333.3	8W/M



Unitop Model No.	IP Rate	Working Environment	Storage Environment	Length	Max Connection	LED Qty (Pcs/M)	N.W/Roll
UTFS-BSCOB320- 2408	IP20	-25~+45℃	-30~+80℃	5m	5m	320	93g


Website: https://www.unitopledstrip.com

E-mail: tom@unitopledstrip.com Mobile: +86-19896260511

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.




### Dimension:

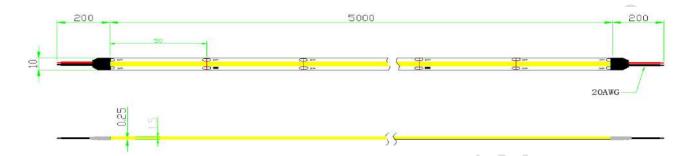



#### **Other IP Options:**

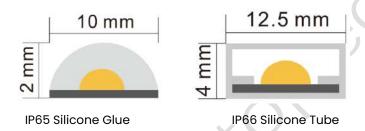


Website: <a href="https://www.unitopledstrip.com">https://www.unitopledstrip.com</a> Mobile: +86-19896260511

4

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.




### **Electrical Principle**

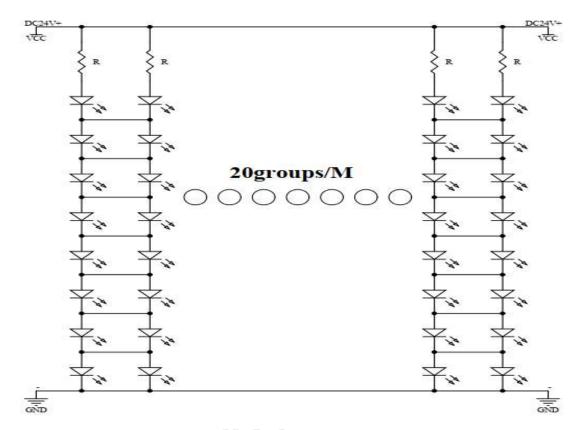


Unitop (China) Co., Limited E-mail: tom@unitopledstrip.com

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.

### -\(\) - Light Distribution Curve:






Website: https://www.unitopledstrip.com

Mobile: +86-19896260511

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.



### **Packing Information:**

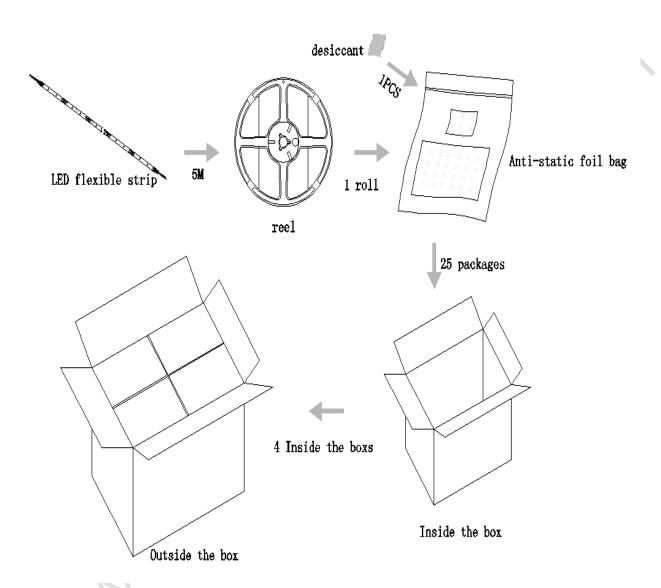

#### **Inner Box:**

Qty: 25reels totally 125m strips. G.W.: 2.60kgs. Size: L303\*W230\*H260mm

#### **Outer Carton:**

Qty: 4 inner boxes totally 500m strips. G.W.: 11.60kgs. Size: L620\*W472\*H280mm


Website: https://www.unitopledstrip.com

Mobile: +86-19896260511

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.



### **Schematic:**

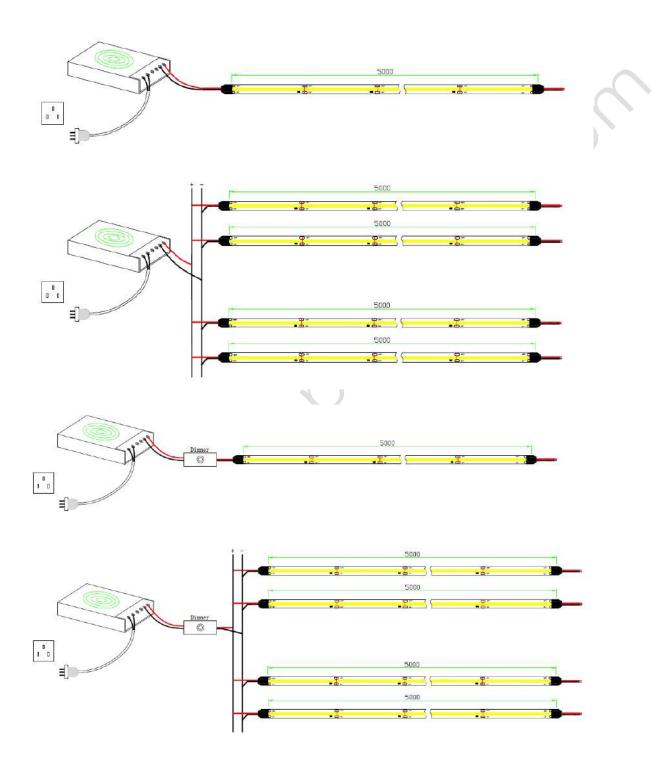

Website: https://www.unitopledstrip.com

Unitop (China) Co., Limited E-mail: tom@unitopledstrip.com Mobile: +86-19896260511

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.





### **Installation Procedure:**

**LED Strip** 




**Scissor** 













Clean the installation surface.


Measure the length you need to install, cut at the nearest cutting mark. For the remaining strip, weld at the next scissor mark to connect with other connection wire.

Do not pull the whole strip from the back release paper at one time. Do not hard press the LEDs.

Connect strip wire to the driver output side (Positive to positive, negative to negative.) Connect the driver plug to wall socket. Switch on and enjoy.

Unitop (China) Co., Limited E-mail: tom@unitopledstrip.com Website: https://www.unitopledstrip.com Mobile: +86-19896260511

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.

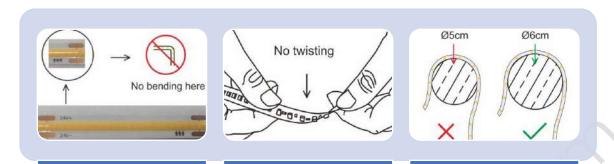

No Bending on points of the LEDs

No twisting too much the COB LED strips No winding on rod with diameter less than 6cm

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.



### **Common Problems and Solutions:**

Problem	Possible Reasons	Solutions			
	Not connected to LED driver.	Connect to suitable LED driver and power on.			
Whole COB strips do not light on	LED driver switched off due to self- protection while open circuit or short circuit.	Trouble shoot and fix or change the LED driver.			
	Wrong connection between strips and driver.	Make sure to connect positive to positive, negative to negative.			
Dartial COD atripo	Some LED drivers failed.	Troubleshoot LED driver and fix.			
Partial COB strips do not light on	Partial wire connection wrong. Some strips are connected with wrong polarity.	Make sure to connect positive to positive, negative to negative.			
	Wrong LED driver with not enough power.	Calculate the strip length and choose suitable wattage LED driver.			
Inconsistent or not enough brightness	Too much circuit loss on LED driver, or big loss difference between each circuit.	<ol> <li>Make sure strip's working voltage is within +5% of the rated voltage.</li> <li>Shorten connection wires or change to thicker wires.</li> <li>Make sure the strip length less than the maximum allowed connection length. Keep similar length for all series strips.</li> </ol>			
	Too many series connection for LED strips	Adjust the connected LED strip length and qty, make sure each circuit is within the maximum connection requirements			
LEDs flash	Poor soldering connection point.	Check and connection and fix them.			
LEDS HOSH	LED driver breaks down	Find the faulty driver and change.			

Unitop (China) Co., Limited Website: https://www.unitopledstrip.com

E-mail: tom@unitopledstrip.com Mobile: +86-19896260511

320pcs chips/M, DC24V, Constant Voltage, IP20, 10mm Width PCB.

### Statements:

- Suggested the installation of COB LED strips to be made by the manufacturer, agent, or other qualified people.
- Please study the above specification before installation.
- The above data is based on our standard product. Please subject to your actual product data if there is a slight difference.
- The above schematic diagrams are from our standard product. Please subject to your existing product if there is a slight difference.
- The LED driver wattage must be at least 1.2 times the overall wattage of the LED strips used for the power supply.
- For safety, do not connect the strips directly to the AC.
- Any acidic or alkaline substance is forbidden.
- No prior notice in case this product or specification is updated.
- Unitop reserves the final right of explanation of the above specification.

Website: https://www.unitopledstrip.com Mobile: +86-19896260511

12