



Popular Series COB LED Strip

Model No.: UTFS-PSCOB420-2408

UT FS PS COB 420 24 08

Unitop	Flexible Strips	Product Series	LED Type	LED Qty/M	Voltage	PCB Width
		Popular Series	COB LEDs	420 LEDs	DC24V	8mm PCB

420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.



- Big beam angle, no dark area, flexible line source with good heat dissipation.
- Most popular type.
- Cutting length: 50mm.
- Inverted COB gold-free technology
- Ra>90, cuttable and re-connectable.
- IP Rate: IP20, IP65, IP66, IP67.
- CE/ROHS certification.
- Warranty: 3 Years



Widely used in hotels, shopping malls, furniture, cabinets, and shelves as decoration and direct

or indirect lighting.



3M Adhesive tape, mounting clips, aluminum profiles.



420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.




Unitop	Color	сст	CRI	View	Lumen	Efficacy	Working	Current	Power
Model No.	00101	001		Angle	lm/m	lm/w	Voltage	(mA/M)	i ower
UTFS- PSCOB420- 2408WW	Warm White	2700К	≥90Ra	180°	789	78.9	24VDC	417	10W/M
UTFS- PSCOB420- 2408WW	Warm White	3000K	≥90Ra	180°	860	86	24VDC	417	10W/M
UTFS- PSCOB420- 2408NW	Natural White	4000K	≥90Ra	180°	933	93.3	24VDC	417	10W/M
UTFS- PSCOB420- 2408CW	Cool White	6500K	≥90Ra	180°	930	93	24VDC	417	10W/M



Unitop Model No.	IP Rate	Working Environment	Storage Environment	Length	Max Connection	LED Qty (Pcs/M)	N.W/Roll
UTFS-PSCOB420- 2408	IP20	-25~+45 ℃	-30~+80 ℃	5m	5m	420	81g




420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

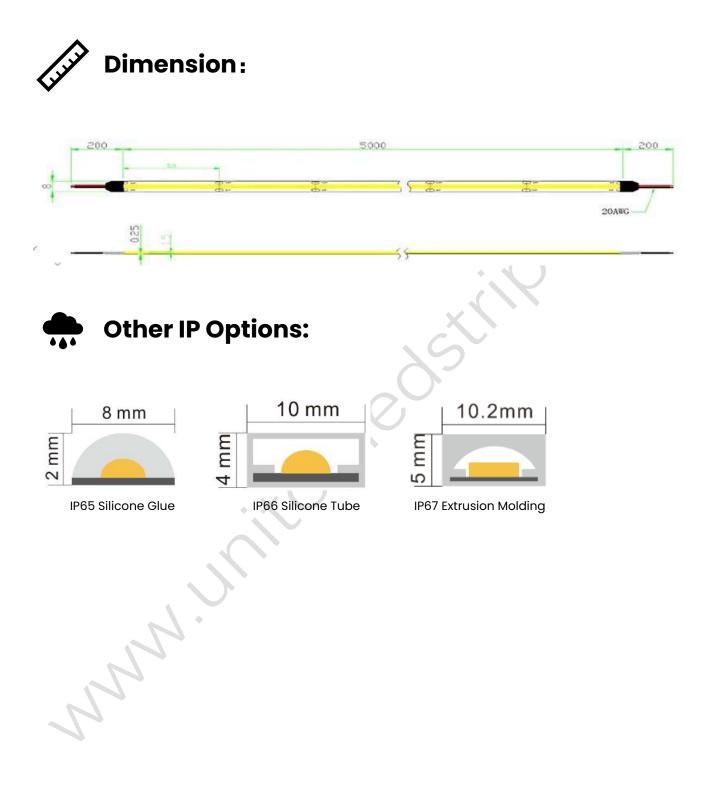



Unitop (China) Co., Limited E-mail: <u>tom@unitopledstrip.com</u>

420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

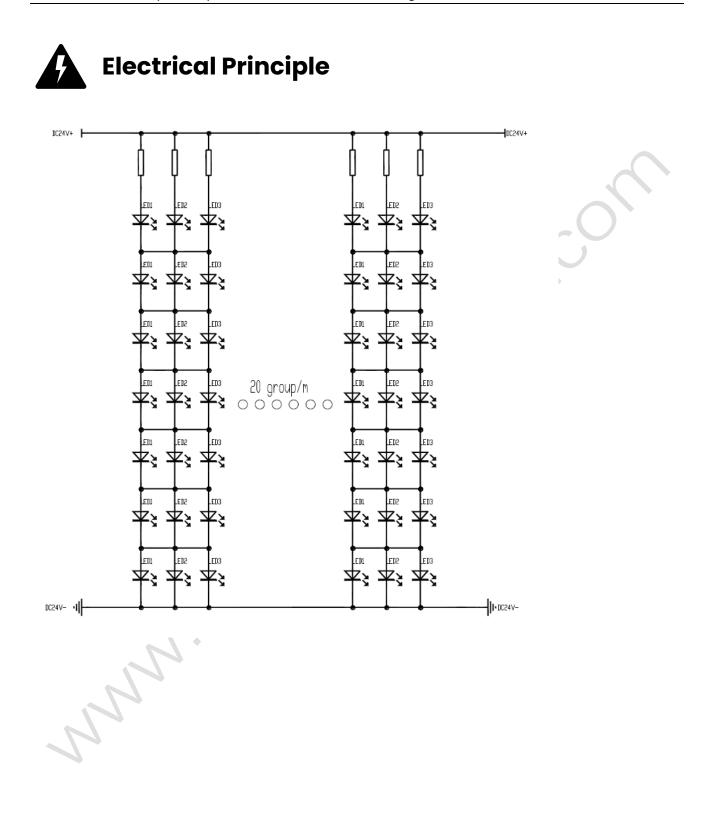




Unitop (China) Co., Limited E-mail: <u>tom@unitopledstrip.com</u>

420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.




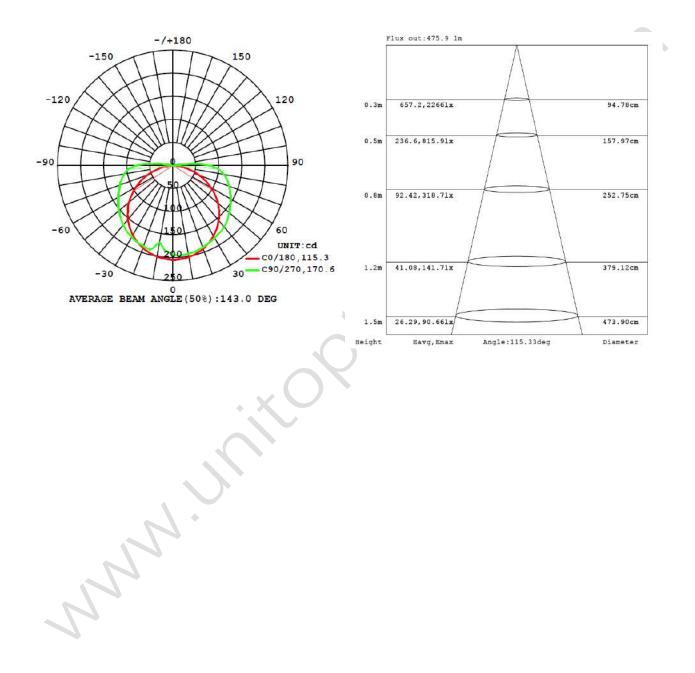



Unitop (China) Co., Limited E-mail: tom@unitopledstrip.com

420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

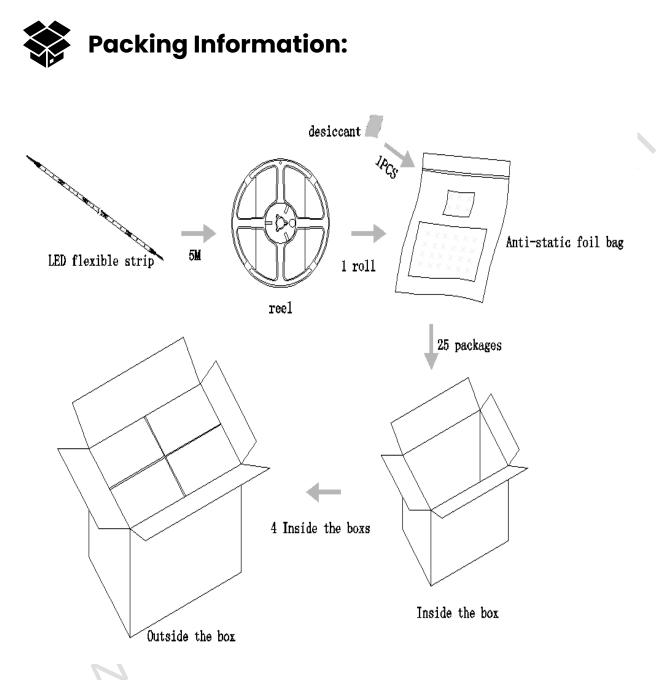

Inner Box:

Qty: 25reels totally 125m strips. G.W.: 2.90kgs. Size: L303*W230*H260mm


Outer Carton:

Qty: 4 inner boxes totally 500m strips. G.W.: 12.12kgs. Size: L620*W472*H280mm



Unitop (China) Co., Limited E-mail: <u>tom@unitopledstrip.com</u>


420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

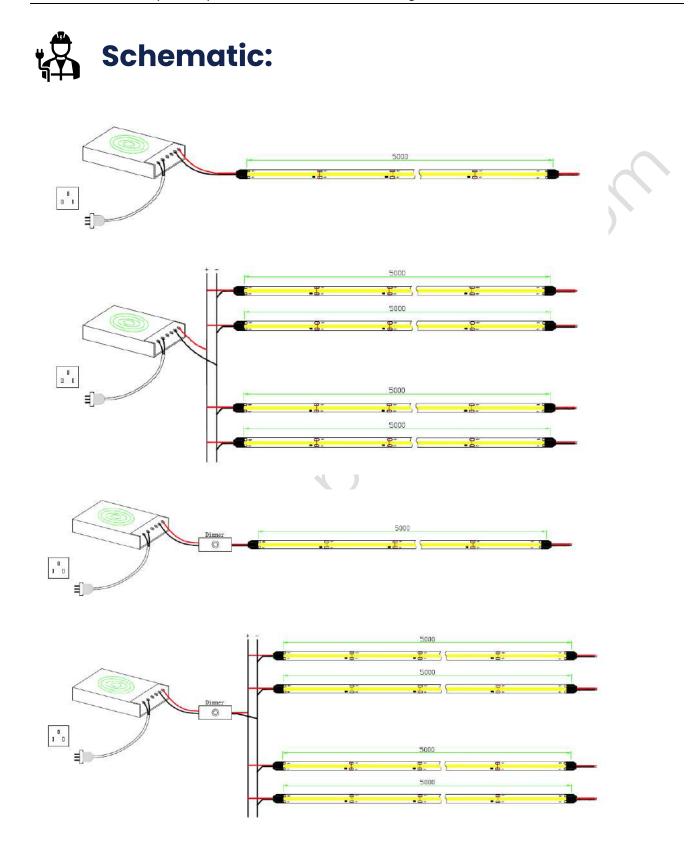



Unitop (China) Co., Limited E-mail: <u>tom@unitopledstrip.com</u>


420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

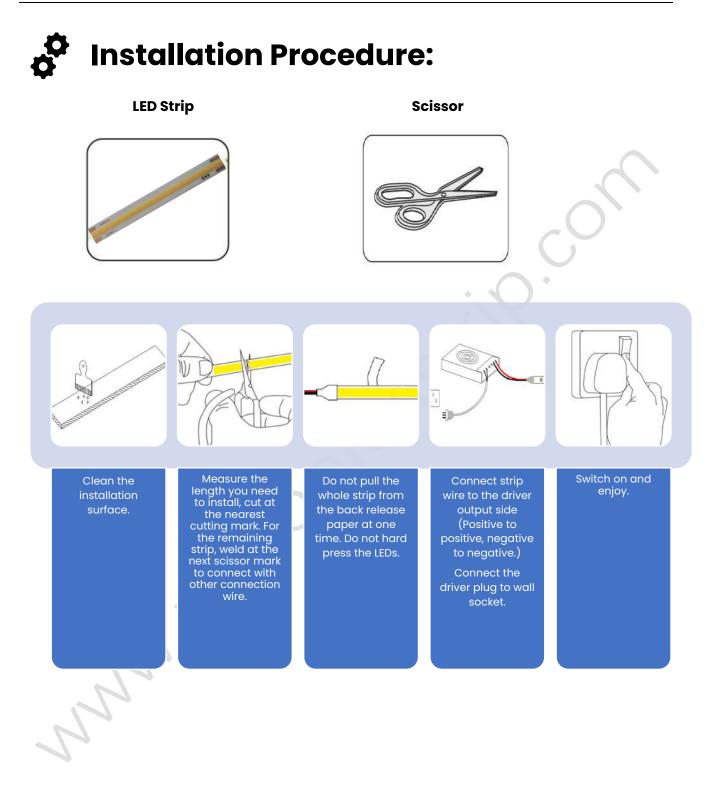



Unitop (China) Co., Limited E-mail: tom@unitopledstrip.com

420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

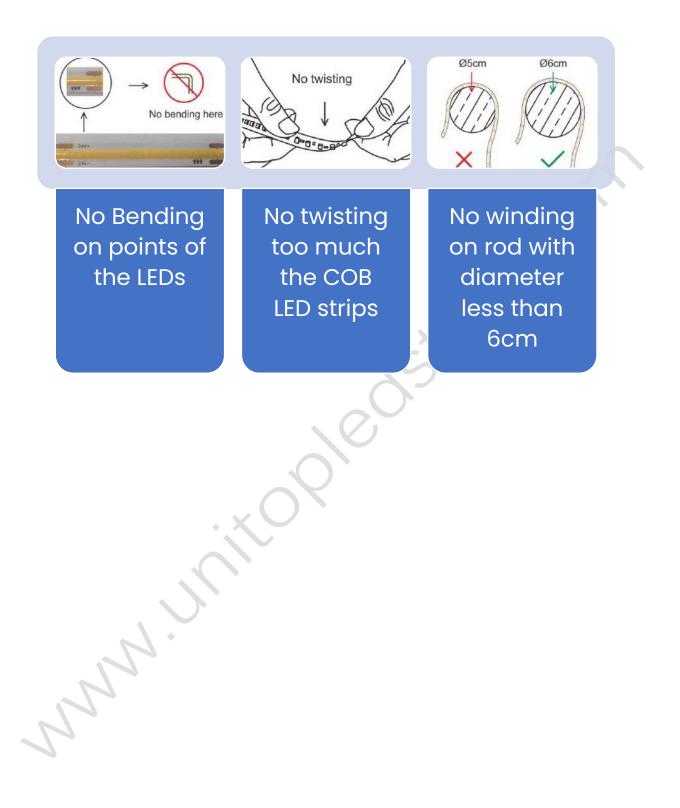



Unitop (China) Co., Limited E-mail: <u>tom@unitopledstrip.com</u>

420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

Common Problems and Solutions:

Problem	Possible Reasons	Solutions				
	Not connected to LED driver.	Connect to suitable LED driver and power on.				
Whole COB strips do not light on	LED driver switched off due to self- protection while open circuit or short circuit.	Trouble shoot and fix or change the LED driver.				
	Wrong connection between strips and driver.	Make sure to connect positive to positive, negative to negative.				
Partial COB strips	Some LED drivers failed.	Troubleshoot LED driver and fix.				
do not light on	Partial wire connection wrong. Some strips are connected with wrong polarity.	Make sure to connect positive to positive, negative to negative.				
	Wrong LED driver with not enough power.	Calculate the strip length and choose suitable wattage LED driver.				
Inconsistent or not enough brightness	Too much circuit loss on LED driver, or big loss difference between each circuit.	 Make sure strip's working voltage is within +5% of the rated voltage. Shorten connection wires or change to thicker wires. Make sure the strip length less than the maximum allowed connection length. Keep similar length for all series strips. 				
	Too many series connection for LED strips	Adjust the connected LED strip length and qty, make sure each circuit is within the maximum connection requirements				
	Poor soldering connection point.	Check and connection and fix them.				
LEDs flash	LED driver breaks down	Find the faulty driver and change.				
NNN						



420pcs chips/M, DC24V, Constant Voltage, IP20, 8mm Width PCB.

💉 Statements:

- Suggested the installation of COB LED strips to be made by the manufacturer, agent, or other qualified people.
- Please study the above specification before installation.
- The above data is based on our standard product. Please subject to your actual product data if there is a slight difference.
- The above schematic diagrams are from our standard product. Please subject to your existing product if there is a slight difference.
- The LED driver wattage must be at least 1.2 times the overall wattage of the LED strips used for the power supply.
- For safety, do not connect the strips directly to the AC.
- Any acidic or alkaline substance is forbidden.
- No prior notice in case this product or specification is updated.
- Unitop reserves the final right of explanation of the above specification.



Unitop (China) Co., Limited E-mail: <u>tom@unitopledstrip.com</u>